



MULTIFUNCTIONAL DIGITAL COLOR SYSTEMS

Safety Information

ES9455 MFP

ES9465 MFP/ES9475 MFP

- Read this manual carefully before using this equipment, and be sure to keep it for future reference.

CONTENTS

Preface	1
Security Precautions	3
Notice to Users	5

Chapter 1 GENERAL PRECAUTIONS

General Precautions	11
When installing or moving	11
When using the Multifunctional Digital Systems	14
During maintenance or inspection	17
When handling supplies	17

Chapter 2 ENVIRONMENTAL INFORMATION

Environmental Information	19
ENERGY STAR® Program	19
Turkey RoHS Compliance	19

Preface

Thank you for purchasing the Oki Multifunctional Digital Systems or Multifunctional Digital Color Systems. The SAFETY INFORMATION describes the necessary precautions for using this OKI Multifunctional Digital Systems.

For your added safety, be sure to read this booklet before using this equipment. The models vary from region to region.

Model name:	Model name on name plate:
• ES9455 MFP	• N31312A, N31312B
• ES9465 MFP	• N31311A, N31311B
• ES9475 MFP	• N31310A, N31310B

If there is a model name in the note, the corresponding model is applicable. If not, the above models are applicable.

Example:

ES9455 MFP: This is a note for using ES9455 MFP.

■ Trademarks

Other company and product names given in this manual or displayed in this software may be the trademarks of their respective companies.

■ Disclaimer Notice

The following notice sets out the exclusions and limitations of liability of OKI DATA CORPORATION (including its employees, agents and sub-contractors) to any purchaser or user ('User') of the ES9455 MFP, ES9465 MFP or ES9475 MFP, including its accessories, options and bundled software ('Product').

1. The exclusion and limitations of liability referred to in this notice shall be effective to the fullest extent permissible at law. For the avoidance of doubt, nothing in this notice shall be taken to exclude or limit OKI DATA CORPORATION's liability for death or personal injury caused by OKI DATA CORPORATION's negligence or OKI DATA CORPORATION's fraudulent misrepresentation.
2. All warranties, conditions and other terms implied by law are, to the fullest extent permitted by law, excluded and no such implied warranties are given or apply in relation to the Products.
3. OKI DATA CORPORATION shall not be liable for any loss, cost, expense, claim or damage whatsoever caused by any of the following:
 - (a) use or handling of the Product otherwise than in accordance with the manuals, including but not limited to Operator's Manual, User's Guide, and/or incorrect or careless handling or use of the Product;
 - (b) any cause which prevents the Product from operating or functioning correctly which arises from or is attributable to either acts, omissions, events or accidents beyond the reasonable control of OKI DATA CORPORATION including without limitation acts of God, war, riot, civil commotion, malicious or deliberate damage, fire, flood, or storm, natural calamity, earthquakes, abnormal voltage or other disasters;
 - (c) additions, modifications, disassembly, transportation, or repairs by any person other than service technicians authorized by OKI DATA CORPORATION; or
 - (d) use of paper, supplies or parts other than those recommended by OKI DATA CORPORATION.

-
4. Subject to paragraph 1, OKI DATA CORPORATION shall not be liable to Customer for:
- (a) loss of profits; loss of sales or turnover; loss of or damage to reputation; loss of production; loss of anticipated savings; loss of goodwill or business opportunities; loss of customers; loss of, or loss of use of, any software or data; loss under or in relation to any contract;
 - or
 - (b) any special, incidental, consequential or indirect loss or damage, costs, expenses, financial loss or claims for consequential compensation;

whatsoever and howsoever caused which arise out of or in connection with the Product or the use or handling of the Product even if OKI DATA CORPORATION is advised of the possibility of such damages.

OKI DATA CORPORATION shall not be liable for any loss, cost, expense, claim or damage caused by any inability to use (including, but not limited to failure, malfunction, hang-up, virus infection or other problems) which arises from use of the Product with hardware, goods or software which OKI DATA CORPORATION has not directly or indirectly supplied

Security Precautions

In order to make correct use of this product's security function, first read the following precautions carefully. Be sure to assign administrators who have enough capability to sustain responsible management since significant privileges for managing and handling this equipment will be given them.

■ To Administrators

- To avoid physical security problems, such as hardware removal or inappropriate disassembly at the installation site, take all necessary measures, such as checking who enters and leaves the site.
- When connecting this product with an outer network such as the Internet, only operate it in a network environment protected by a firewall, etc. to prevent information from being leaked due to incorrect settings or avoid illegal access by unauthorized users.
- To prevent the configuration settings from being altered improperly or similar, before you use this product, change the administrator and user registration passwords set by factory default. Also, be sure periodically to change each password set for this product.
- In order to make proper use of the network and user management functions, be sure to read the TopAccess Guide first.
- Be sure to understand the security policy and its procedure in your organization, and manage and operate this equipment according to the policy after first reading the operator's manual. Then explain the security instructions to general users who are authorized to use this equipment to let them conform to the security rule.
- Provide general users with the appropriate privilege of using this equipment and keep supervising its correct operation.
- Always check if the network function and user management function are enabled in order to maintain security. Should you happen to come across any abnormality, contact your service technician immediately. See the TopAccess Guide for the checking method.
- If any failure or unauthorized access occurs in this equipment, check the logs in TopAccess to find the cause. For details of checking logs, refer to the TopAccess Guide.

■ To general users

- After you have finished operating the equipment, be careful not to forget to remove any originals, printed paper or USB storage devices.
- Change the password regularly. Make sure not to use any predictable number such as your birthday or employee ID number, and keep it secret.
- Do not leave the equipment during the performance of the job since your originals may be seen or the output paper could be taken by someone.
- Check your log regularly to guard against unauthorized access by identity theft. If there are too many logs, you may find the one you want more easily using the sort function in TopAccess.


■ Data Encryption Function

An icon  appears on the touch panel when the user data of the Data Encryption Function by AES are enabled on this equipment.

How to check the active status of Data Encryption Function

Press the [COUNTER] button on the control panel. This icon  appears at the touch panel if the Data Encryption Function is enabled.

Contact your service technician for the use of the Data Encryption Function.



Notice to Users

After a suitable place has been selected for the installation of the ES9455 MFP, the ES9465 MFP or the ES9475 MFP, please do not change it. Avoid excessive heat, dust, vibration and direct sunlight. Also, provide proper ventilation as the copier emits a small amount of ozone.

For the U.S.A. only

FCC NOTICE

ES9465 MFP/ES9475 MFP

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 and Part 18 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

ES9455 MFP

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

WARNING

Changes or modification made to this equipment, not expressly approved by Oki Data or parties authorized by Oki Data, could void the user's authority to operate the equipment.

For the U.S.A. and Canada

Regulatory Information

Oki is dedicated to preserving the environment by sponsoring Call2Recycle, a program of the Rechargeable Battery Recycling Corporation. For more information and for drop-off locations, visit www.rbrc.org or call 1-800-822-8837.

Notice regarding CR coin cell batteries, applicable to California, U.S.A. only: Perchlorate Material - special handling may apply.

See <http://www.dtsc.ca.gov/hazardouswaste/perchlorate/>

For Canada only

This Class A digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

For the EU only

Working environment

From EMC (Electromagnetic Compatibility) point of view, the operation of this product is being restricted in following environments:

- Medical Environments: This product is not certified as a medical product according to the Medical Product Directive 93/42/EEC.
- Domestic environments (e.g. a private living room with TV / Radio sets in the nearby surrounding area) because this is a so called EMC class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures!

Any consequences resulting from the use of this product in restricted working environments are not the responsibility of Oki Data.

The consequences of the use of this product in restricted working environments may be an electromagnetic interference with other devices or machines in the nearby surrounding area. This can result into malfunction including data loss / data error pertaining to this product or the other devices / machines involved in the electromagnetic interference.

Furthermore, for general safety reasons, the use of this product in environments with explosive atmospheres is not permitted.

CE compliance

This product is labelled with the CE mark in accordance with the provisions of the applicable European Directives, notably the Low Voltage Directive 2006/95/EC, the Electromagnetic Compatibility Directive 2004/108/EC for this product and the electric accessories, the Radio Equipment and Telecommunications Terminal Equipment Directive 1999/5/EC for the telecommunication accessories.

CE marking is the responsibility of Oki Europe Limited Biays House Wick Rode Egham Surrey, TW20 OHJ United Kingdom.

For a copy of the related CE Declaration of Conformity, please contact your dealer or Oki Data.

Warning:

This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Following information is for EU-member states only:



This product is marked according to the requirement in EU-Directive 2002/96/EC.
(Directive on Waste electrical and electronic equipment - WEEE)

The use of the symbol indicates that this product may not be disposed as unsorted municipal waste and has to be collected separately. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product.

For more detailed information about the take-back and recycling of this product please contact your supplier where you purchased the product.

Following information is for EU-member states only:



Disposal of batteries and/or accumulators
(based on EU-Directive 2006/66/EC,
Directive on batteries and accumulators and waste batteries and accumulators)

By ensuring that batteries and/or accumulators are disposed of correctly, you will help prevent potential negative consequences for the environmental and human health, which could otherwise be caused by inappropriate waste handling of this product.

For more detailed information about the take-back and recycling of batteries and/or accumulators, please contact your supplier where you purchased this product.

Following information is only for India:



The use of the symbol indicates that this product may not be treated as household waste. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product.

For more detailed information about the take-back and recycling of this product, please contact your supplier where you purchased the product.

■ Supplies / Parts

- **Dependability**
Genuine Oki supplies are subjected to the strictest of inspections so that every supply you receive will perform at optimal levels.
- **High Productivity**
Genuine Oki supplies are created to meet the demands of our competitive world and provide highspeed reliable copies when you need them.
- **Stable Image Quality**
Genuine Oki supplies are designed to provide consistently stable image output.
- **Copier-friendly Supplies**
Genuine Oki supplies are designed to help to keep the copier and all its parts in troublefree working order. Reduction of machine wear is due to Oki's intimate knowledge of the copier's characteristics, ensuring the highest standard of care.
- **Perfectly Suited Supplies**
From the beginning Oki supplies and machines were made for each other. Whenever Oki designs a new machine, it also designs a new toner that is made just for that machine. By using Genuine Oki supplies with Oki copiers, you are guaranteed optimum performance.

■ Toner

- **Optimum Image Quality**
Oki toner is manufactured using ultra-fine quality materials under precisely controlled conditions to ensure that your Oki copiers will continually generate sharp high-quality images.
- **Cost Advantage**
Genuine Oki toner provides value. Only the proper amount of toner is used during the reproduction process, thereby enabling the machine to continue to operate until all the toner has been used. In this way you get the full value from each cartridge used.
- **Environmental Harmony**
Genuine Oki toner is manufactured with the environment in mind. To protect our planet for the benefit of future generations, we use embossed or plastic labels, making our toner cartridges fully recyclable. In addition, dust and ozone levels have been reduced to improve the working environment.
- **User Friendly**
Before approving our toners for sale, we test them to be sure that they pass the strictest of health standards. This takes all the worry out of handling the toner.

■ General

- **Service and Support Benefits**
Oki's Service technicians are certified to keep your copier performing at optimum levels. To ensure continuous image quality, utilize an authorized Oki Service provider to care for and perform periodical maintenance on your copier.

■ How to read this manual

□ Symbols in this manual

In this manual, some important items are described with the symbols shown below. Be sure to read these items before using this equipment.

WARNING

Indicates a potentially hazardous situation which, if not avoided, could result in death, serious injury, or serious damage, or fire in the equipment or surrounding objects.

CAUTION

Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury, partial damage to the equipment or surrounding objects, or loss of data.

Note

Indicates information to which you should pay attention when operating the equipment.

Other than the above, this manual also describes information that may be useful for the operation of this equipment with the following signage:

Tip

Describes handy information that is useful to know when operating the equipment.



Pages describing items related to what you are currently doing. See these pages as required.

GENERAL PRECAUTIONS

1

General Precautions

■ When installing or moving

WARNING

ES9455 MFP

For the U.S.A. and Canada

Multifunctional Digital Systems require 120-127 V AC, 12 A, 50/60 Hz electric power.

For the EU

Multifunctional Digital Systems require 220 - 240 V AC, 8A, 50/60 Hz electric power.

Except the U.S.A., Canada and the EU

Multifunctional Digital Systems require 220 - 240 V AC, 8A, 50/60 Hz electric power.

ES9465 MFP and ES9475 MFP

For the U.S.A. and Canada

Multifunctional Digital Systems require 120-127 V AC, 12 A, 50/60 Hz electric power.

For the EU

Multifunctional Digital Systems require 220 - 240 V AC, 8 A, 50/60 Hz electric power.

Except the U.S.A., Canada and the EU

Multifunctional Digital Systems require 220 - 240 V AC, 8 A, 50/60 Hz electric power.


- Do not use a power supply with a voltage other than that specified.
Avoid multiple connections in the same outlet. This could cause a fire or give you an electric shock. If you are considering increasing the number of outlets, contact an electrician.
- Always connect this Multifunctional Digital Systems to an outlet with a ground connection to avoid the danger of fire or electric shock in case of short-circuiting. Contact your service representative for the details. Be sure to use a 3-conductor, grounded wall outlet.
In areas, except the U.S. and Canada, where a 2-pin plug is used, the Multifunctional Digital Systems must be grounded for safety. Never ground it to a gas pipe, a water pipe, or any other object not suitable for grounding.
- Plug the power cord securely into the outlet. If it is not plugged in properly, it could heat up and cause a fire or give you an electric shock.
- Do not damage, break or attempt to repair the power cord.
The following things should not be done to the power cord.
 - Twisting it
 - Bending it
 - Pulling it
 - Placing anything on it
 - Heating
 - Situating it near radiators or other heat sourcesThis could cause a fire or give you an electric shock. If the power cord is damaged, contact your service representative.

- Do not install the equipment by yourself or try to move it once it has been installed. This could result in an injury or damage to the device. Contact your service representative if the equipment needs to be installed or moved.
- The socket outlet shall be near the equipment and be easily accessible.
- Pull out the plug from the outlet more than once a year to clean around the prongs. Accumulating dust and dirt could cause a fire due to the heat released by electric leakage.


CAUTION

- When removing the plug from the outlet, do not pull the power cord. Always hold the plug when removing it from the outlet. If the power cord is pulled, the wires may break and this could cause a fire or give you an electric shock.
- Make sure that the ventilation holes are not blocked.
If the temperature within the Multifunctional Digital Systems becomes too high, a fire could result.
- Both the Paper Feed Pedestal and the Large Capacity Feeder have 4 adjusters (antiskid devices) underneath. After the equipment has been moved and installed, be sure to turn and lower them to fix it. For the Paper Feed Pedestal, fix the fall-prevention stoppers after the adjusters have been adjusted.

Paper Feed Pedestal

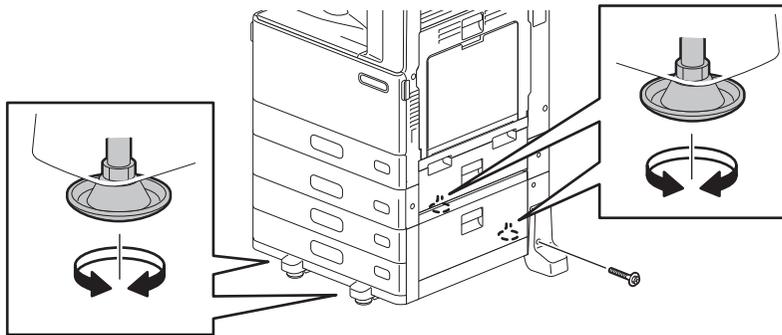


Large Capacity Feeder

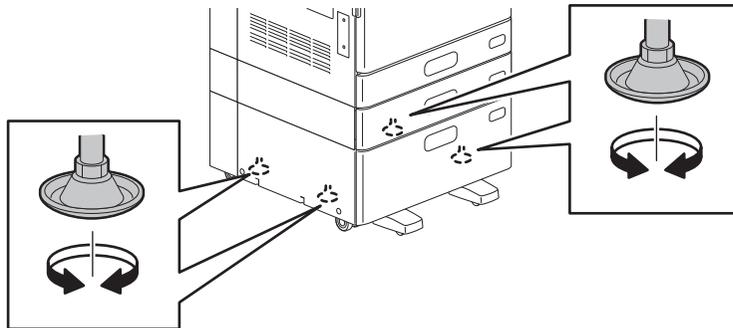


Before moving the equipment with the Desk installed, remove the front stabilizer. Be sure to reinstall it after the equipment has been moved.

Removing the stabilizer

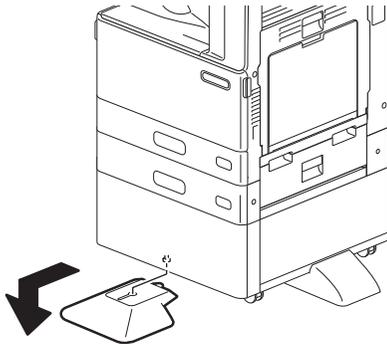

Installing the stabilizer

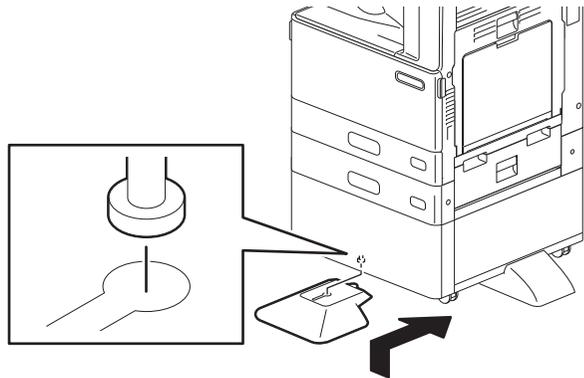

⚠ WARNING

Do not install the equipment by yourself or try to move it once it has been installed. This could result in an injury or damage to the device. Contact your service representative if the equipment needs to be installed or moved.

□ Other points

- If there is insufficient space around the equipment, the poor ventilation will result in malfunction, also some operations such as Feeding from MPT and releasing paper misfeeds may become difficult. To ensure adequate space, follow the table below as a guide.

Model	Adequate space		
	Rear	Left	Right
ES9455 MFP ES9465 MFP ES9475 MFP	20 cm (7.9")	30 cm (11.8")	80 cm (31.5")

- Be sure to fix the power cable securely so that no one trips over it.
- Adverse environmental conditions may affect the safe operation and performance of the Multifunctional Digital Systems, and the Multifunctional Digital Systems could break down.
 - Avoid locations near windows or with exposure to direct sunlight.
 - Avoid locations with drastic temperature fluctuations.
 - Avoid too much dust.
 - Avoid locations that suffer from vibration.
- Make sure that the air is able to flow freely and that there is sufficient ventilation. Without adequate ventilation, the unpleasant odor released by ozone will begin to dominate the atmosphere.

■ When using the Multifunctional Digital Systems

WARNING


- Do not take off the cover of the equipment; otherwise you could be injured or get an electric shock.
- Do not remove or connect the plug with wet hands, as this could give you an electric shock.
- Do not place any container with liquid (flower vases, coffee cups, etc.) on or near the equipment. This could cause a fire or give you an electric shock.
- Keep paper clips and staples away from the air vent. If not, a fire could result or you could get an electric shock.
- If the Multifunctional Digital Systems becomes excessively hot, smoke comes out of it or there is an odd smell or noise, proceed as follows.
Turn the main power switch OFF and remove the plug from the outlet, then contact your service representative.
- If the Multifunctional Digital Systems will not be used for more than one month, remove the plug from the outlet for safety purposes during that time. If an insulation failure occurs, this could cause a fire or give you an electric shock.

CAUTION

- Do not place heavy objects (4 kg/9 lb. or more) on the original glass and do not press on it with force. Breaking the glass could cause personal injury.
- Do not place heavy objects (4 kg/9 lb. or more) on the Multifunctional Digital Systems. If the objects fall off, this could cause injury.
- Do not touch the fuser unit or the metal area around it. Since they are very hot, you could be burned or the shock could cause you to injure your hand in the machine.
- Be careful not to let your fingers be caught when closing the tray. This could cause an injury.
- Be careful not to let your fingers be caught between the equipment and the duplexing unit or automatic duplexing unit. This could cause an injury.
- Do not touch the metal portion of the guide plate in the duplexing unit or automatic duplexing unit as it could burn you.
- Do not touch the hinge (= a connecting part) on the rear side of the Reversing Automatic Document Feeder. This could catch and injure your fingers when you open or close the Reversing Automatic Document Feeder.
- Always keep hands and fingers clear of the finisher tray hinge, as the tray could move unexpectedly. Failure to do so could result in injury to your hand and/or fingers.
- Do not use the pulled out trays as steps. This could injure you if you fall.
- When changing the angle of the control panel, be careful not to catch your hands in the gap between the equipment and the control panel. This could cause personal injury.
- Do not place objects of weighing 3.3 kg/7.3 lb. or more on the optional work table. Breaking the work table could cause personal injury.

□ Position of certification labels, etc.

ES9455 MFP

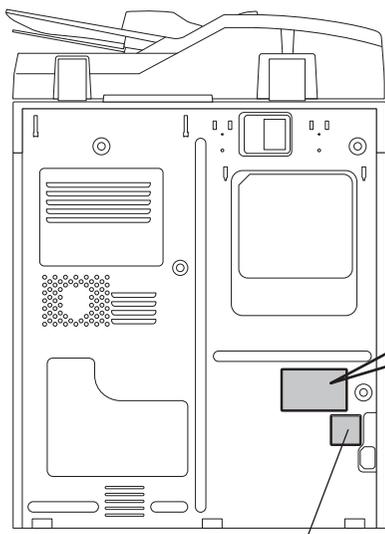


Warning for grounding wire

Identification label


For the U.S.A. and Canada	
Model/Modelo N31312A AC120-127V 50/60Hz 12A	
 <small>complies with UL 60950-1 CSA C22.2 No.60950-1</small>	
TC Oki Data Corporation Made in China/Fabrique en Chine	
For the EU and Other	
Model No. N31312B AC220-240V 50/60Hz 8A	
	
OKI EUROPE LIMITED Blays House, Wick Road, Egham, Surrey, TW20 0HJ, United Kingdom	<small>EU ONLY</small> ZERTIFIZIERT <small>www.tuv.com ID 1000000000</small>
TC Oki Data Corporation Made in China	

Warning for high temperature area (Fuser unit)




Warning for high temperature area (Fuser unit)

Warning for high temperature area (Ventilation holes)



ES9465 MFP and ES9475 MFP

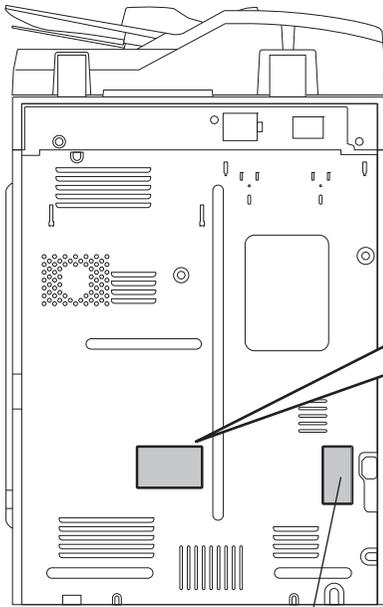

Identification label

For the U.S.A. and Canada

Model/Modelo N31310A
AC120-127V 50/60Hz 12A



complies with
UL 5085-1
CSA C22.2 No.60950-1

TC
Ok! Data Corporation
Made in China/Fabrique en Chine

For the EU and Other

Model No. N31310B
AC220-240V 50/60Hz 8A




OKI EUROPE LIMITED
Blays House, Wick Road, Egham,
Surrey, TW20 0HN, United Kingdom

www.oki.com
ID: 100000000


TC

Ok! Data Corporation
Made in China

Warning for grounding wire



Warning for high temperature area
(Fuser unit)



Warning for high temperature area (Fuser unit)

Other points

- Be very careful to treat the touch panel gently and never hit it. Breaking the surface could cause malfunctions.
- Do not turn the power OFF with misfed paper remaining inside the equipment. This could cause a malfunction when the power is turned ON next time.
- Be sure to turn the power OFF when leaving the office or if there is a power outage. However, do not turn the power OFF if the weekly timer is in use.
- Be careful because the paper exit area and paper just after exiting are hot.
- Do not place anything other than paper on the receiving tray. This could disturb a normal operation and cause malfunctions.
- Do not touch the photoconductive drum, transfer belt and 2nd transfer roller. This could cause image problems.
- Do not open/close the covers and the MPT, or pull out the trays during printing.

■ During maintenance or inspection

⚠ WARNING

- Never attempt to repair, disassemble or modify the Multifunctional Digital Systems by yourself. You could cause a fire or get an electric shock.
Always contact your Service representative for maintenance or repair of the internal parts of the Multifunctional Digital Systems.
- Do not let liquids such as water and oil get into the system when cleaning the floor. This could cause a fire and give you an electric shock.

⚠ CAUTION

- Always keep the plug and outlet clean. Prevent them from accumulating dust and dirt. This could cause a fire and give you an electric shock due to the heat released by electric leakage.
- Do not touch the stapling area. The actual needle point could cause you personal injury.

□ Other points

- Do not use such solvents as thinner or alcohol when cleaning the surface of the Multifunctional Digital Systems.
 - This could warp the shape of the surface or leave it discolored.
 - When using a chemical cleaning pad to clean it, pay attention to any cautionary points.

■ When handling supplies

⚠ CAUTION

- Never attempt to incinerate toner cartridges and waste toner boxes. Dispose of used toner cartridges and waste toner boxes in accordance with local regulations.

□ Other points

- Read the operator's manual carefully to replace the toner cartridge using the correct procedure. An improper procedure could cause toner leakage or scattering.
- Do not open the toner cartridge forcibly. This could cause toner leakage or scattering.
- Keep the toner cartridge out of the reach of children.
- If toner is spilt on your clothes, wash it off with cold water. If you use warm water, your clothes will be permanently stained with toner because it will not come out .
- If toner leaks from the toner cartridge, be careful not to inhale or touch it.

First-aid measures

If you inhale or touch toner, etc; carry out the following treatment.

- Inhalation: Remove from exposure area to fresh air immediately. Contact a physician if there is any difficulty in breathing or other signs of distress.
- Skin Contact: Wash with soap and water. Wash clothing before reuse. If irritation occurs or is persistent, seek medical attention.
- Eye Contact: Immediately flush eyes with plenty of water for at least 15 minutes. If irritation persists, call a physician.
- Ingestion: Dilute stomach contents with several glasses of water.

ENVIRONMENTAL INFORMATION

2

Environmental Information

■ ENERGY STAR® Program

Oki Data Corporation, as a member of the ENERGY STAR Program, attaches the ENERGY STAR logo to all products which meet the ENERGY STAR Program requirements.



The ENERGY STAR Program aims at the promotion of the development and wider usage of office equipment including energy-efficient computers in order to address environmental issues such as global warming. Manufacturers that participate in this program can attach the ENERGY STAR logo to products after confirming that they meet the energy saving standards of this program. Also, these standards and logo are commonly used within the U.S. Environmental Protection Agency (EPA) and participating countries. Specified products, sales countries or regions may not be included.

To distinguish whether or not the product meets the ENERGY STAR Program requirements, check if the corresponding logo is on the product.

If you have any questions, contact your service representative.

■ Turkey RoHS Compliance

AEEE Yönetmeliğine Uygundur.

This information is applicable for the Republic of Turkey only.

Oki Data Corporation
4-11-22 Shibaura, Minato-ku, Tokyo
108-8551, Japan

www.okiprintingsolutions.com

