


# ML320/ML321 DOT MATRIX PRINTER

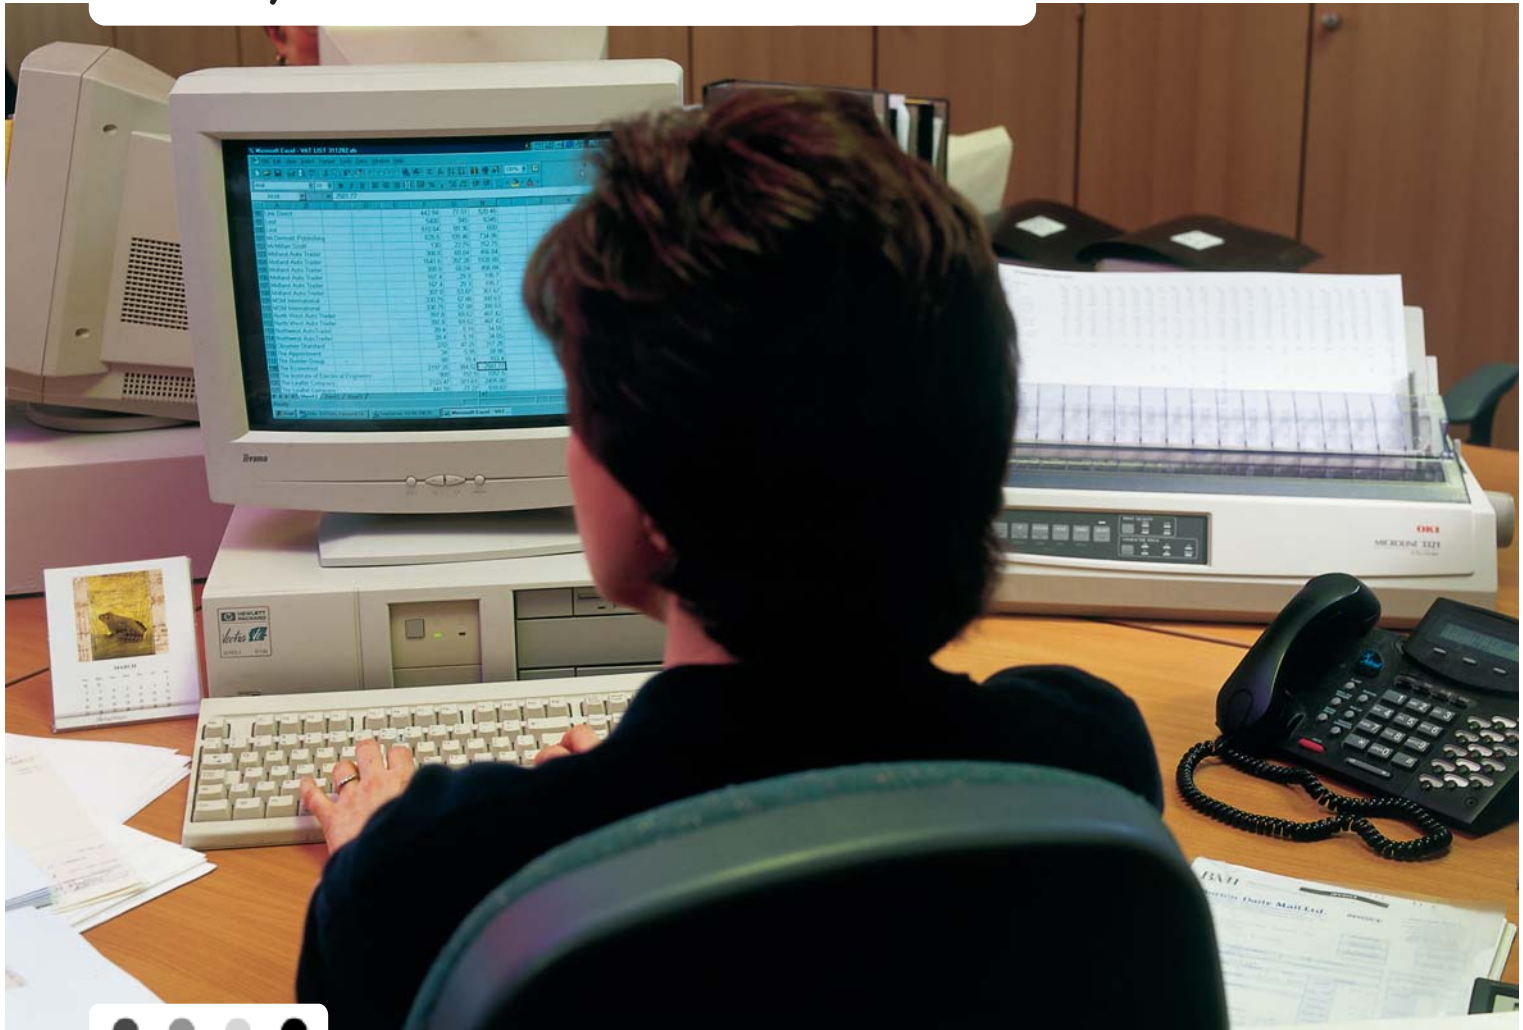

- ❖ ML320
- ❖ ML321
- ❖ 9-PIN DOT MATRIX PRINTER

## HIGH PERFORMANCE, VERSATILE PRINTER FOR DEDICATED FORMS PRINTING

The ML320/ML321 narrow and wide carriage printers are suited to high speed, high volume data and word processing applications where fast throughput and flexible paper management are required. Outstanding reliability, ease-of-use and barcoding facilities make them ideal for customer service points in wholesale, retail and service environments that produce applications.

## MAIN FEATURES OF THE ML320/ML321 PRINTER

- ❖ 80/136 column dot matrix printers
- ❖ High durability 9-pin print head
- ❖ Up to 435 characters per second print speed
- ❖ Multi-part paper-handling (original + 4 copies)
- ❖ Wide carriage (ML321) ideal for accounts applications



# OKI

# ML320/ML321 DOT MATRIX PRINTER

## PRODUCT SPECIFICATION

		ML320	ML321
<b>General</b>	Number of pins	9	
	No. of multi-part forms	5 (one original + 4 copies)	
<b>Speed &amp; throughput</b>	Super speed (12cpi)	435cps	
	High speed draft (12cpi & 10cpi)	387cps	
	Utility (12cpi & 10cpi)	290cps	
	Near letter quality (12cpi & 10cpi)	73cps	
	Fastest print speed	435cps	
<b>Font &amp; print features</b>	Carriage width (10cpi)	80 columns	136 columns
	Max. in compressed mode	160 columns	272 columns
	Character pitch	10/12/15/17/20 pitch & proportional	
	Graphics resolution	Up to 240 x 216 dpi	
	Resident typefaces	Courier, Gothic, Draft, Utility + Barcodes	
	Font styles	Italics, Scalable	
<b>Emulations &amp; interfaces</b>	Printer emulations	Epson FX, IBM ProPrinter/Graphics, Oki MicroLine	
	Standard interfaces	Centronics Parallel + USB	
	Optional interfaces	Serial RS 232C/RS 422/Ethernet	
<b>Paper-handling</b>	Continuous paper	76—254mm	76—406mm
	Continuous envelopes	165 x 91mm	239 x 102mm
	First printable line (from top of page)	8.9mm	
	Standard	Paper parking, Zero tear-off, Autoload single sheet, Push tractors, Bottom feed	
	Optional	Pull tractors, Push tractors, Dual bin cut- sheet feeder (ML320 only), Roll paper stand (ML320 only)	
<b>Physical</b>	Dimensions (HxWxD)	116 x 398 x 345mm	116 x 552 x 345mm
	Weight	6.5kg	8.5kg
	Memory	28KB	
	Noise level	57dB(A)/52dB(A) (quiet mode)	
<b>Power</b>	Power requirements	230V AC (+6%, -14%) 240V AC (±10%)	
	Frequency	50/60Hz	
<b>Reliability</b>	Print head life	200 million characters	
	Ribbon life	3 million characters in utility mode at 10cpi (re-inking cartridge)	
<b>Supplies life</b>	MTBF	10,000 hours	

### OKI DATA AUSTRALIA PTY. LTD.

Level 1, 67 Epping Road  
Macquarie Park, NSW 2113  
Australia  
T 1800 800 140  
[www.oki.com.au](http://www.oki.com.au)

### OKI DATA NEW ZEALAND

8 Antares Place, Rosedale  
Auckland 0632  
New Zealand  
T 0800 654 669  
[www.oki.co.nz](http://www.oki.co.nz)

# OKI